




## Compact IP PBX with huge potential Slican IPS-08

Do you run a small business and are you looking for better communication solutions? Chose IP PBX Slican IPS-08. It is user-friendly, compact IP PBX with great potential. With built-in GSM gateway, VoIP and integrated recording is ideal for small businesses that require innovative solutions in their daily work.

It is compatible with other Slican IPx products, which can work independently, operates as an IP gateway or be a part of a dissipated network of Slican PBX-es. IPS-08 is a stable and convenient option. The optimal technical parameters, small size, easiness of connection to the network, the ability to automatically reconfigure, friendly administration system Slican ConfigMAN makes it the perfect solution for many users. The user has a choice of four versions of IPS-08.

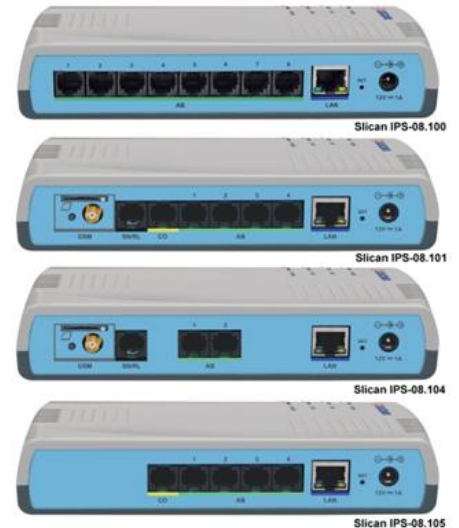

IP PBX IPS-08



### INTEGRATION

The latest generation of Slican CTI Communicator provides complete and quick communication and supports teamwork. Applications designed for versatility and accessibility of multiple devices: PC, desk phone and smartphones – which supports "select and click" function. In addition open protocols like CTIP, XML, HTTP, HOTELP, TAPI and EdbRECP, allow integration of IP PBX IPS-08 with third-party applications.



### NETWORKING

IP PBX Slican IPS-08 series can be linked with other Slican PBXes by eSSL protocol. IPS-08 may be part of a dissipated telecommunications network linking offices in different locations within a larger network of IPS-08, IPL-256, IPM-032, IPU-14 and MAC-6400 PBX-es. Networking with other vendors PBXes is realized by SIP protocol.



### COST CONTROL

Online support allows you to apply cost saving policy for your company, associated with programming and PBX service. LCR (Least Cost Routing) solution, billing applications, ensure the lowest bills and cost control. Slican WebCTI allows the department manager to identify and assign limits on calls for every employee.



### WORK ORGANIZATION

With powerful solutions, IPS-08 can be used as an IP PBX or VoIP gateway. The functionality of the VoIP gateway is the ideal solution, especially for those branch offices with poor telephone network infrastructure. Built-in call recording system and interaction with door phones enables the company to better organize work. The small size of server, the ease of connecting to the network, the ability to automatically reconfigure and friendly administration system Slican ConfigMAN cause the server Slican IPS-08 is an effective solution for many users.



## Compact IP PBX with huge potential Slican IPS-08

		IPS-08.100	IPS-08.101	IPS-08.104	IPS-08.105
Maximal capacity	Analogue ports AB (FXS)	8	4	2	4
	Analogue trunks POTS (FXO)	-	1	-	1
	IP channels	8	8	2	4
	IP trunks (SIP)	8	8	8	8
	IP subscribers (SIP)	16	16	8	8
	GSM trunks	-	1	1	-
	CTS IP system ports	16	16	8	8
	Calls recording channels	8	8	-	-
	MicroSD memory cards	1	1	-	-
	SN / RL ports	-	1/1	1/1	-
Available devices	Slican IP system phones CTS-102.IP, CTS-203.IP, CTS-330.IP*, CTS-330.IPBT**				
	Slican SIP phones VPS-2000P, VPS-804P and VPS-802				
	Slican analog phones XL-2023ID and XL-209				
	hot line Slican phone HLP-22				
	Slican consoles CTS-232 and CTS-338				
	Slican DPH series door phones				
	Multi Switch Box (MSB-1102) and Multi Audio Box (MAB-1101)				
Applications supporting IPS-08	Slican CTI Communicator - PhoneCTI, MobileCTI and WebCTI				
	Slican BillingMAN / BillingMAN.plus				
	Slican RecordMAN.server / RecordMAN.client				
	Slican ConfigMAN.admin / ConfigMAN.user				
VoIP parameters	Supported protocols	eSSL, SIP 2.0 codec G.711a	eSSL, SIP 2.0 codec G.711a	SIP 2.0 codec G.711a	SIP 2.0 codec G.711a
	Working mode	VoIP master or / and slave			
Protocols	Voice communication protocols	SIP 2.0	POTS / SIP 2.0 / GSM900 / 1800 / 1900	POTS / SIP 2.0 / GSM900 / 1800 / 1900	POTS / SIP 2.0
	Server communication protocols	CTIP / HOTELP / TAPI / EbdRECP / HTTP / XML			
Port Ethernet 10 / 100		1			
Power supply		~230 V;50 Hz; < 15 VA (external PS 12 V / 1,2A)			
Dimensions (mm) height x width x depth		191 x 111 x 36			
Weight		300 g			

\*need PBX firmware version 6.20 or higher, \*\*need PBX firmware 6.30.0060

The presented material is for information purposes. In order to properly configure of PBX, we recommend contact and consultation with Slican Distributor / Reseller.