




## ITS IP PBX - world is closer to you

Are you a small business owner and looking for better communication solutions? Now you can use both - traditional telephony and VoIP. It's easier than you think. Select Slican ITS IP PBX. It is friendly to use, compact IP telephone exchange, which you can install in your office or at home.

You can log VoIP (SIP) phones into ITS IP PBX or connect ordinary phones and fax machines, door phones and softphone programs. Available models of IP PBX ITS can handle a few to several subscribers.

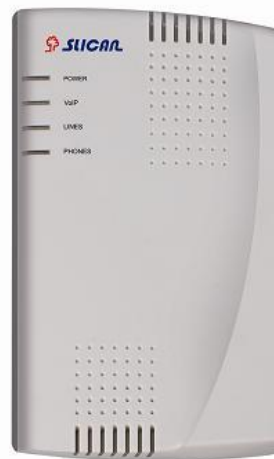

IP PBX Slican ITS



### COMMUNICATION FOR YOU

Small PBX VoIP offers comprehensive communications for businesses and consumers. Attractive price and variety of functions - a combination of IP with TDM telephony, provides cheap, fast and reliable communications across networks for clients requiring stable communication solutions. Slican ITS PBX provides access to Internet telephony without any additional gateways, cards and IP phones, and regular phones achieved more abilities.



### COMFORT OF SERVICE

Easy installation (Plug & Play) and remote management via LAN or Internet using a web browser, ensures you complete service comfort. ITS PBX works with Slican DPH series PBX door phones. You can conveniently handle through a single device phone calls and open a door or gateway. ITS PBX is equipped with a series of useful features such as, e.g.: LCR, ability to define tasks and constraints by incoming and outgoing calls or 3PTY calls. Slican ITS PBX provides the highest level of service calls and comfort for the user.




### CHARACTERISTIC

Easy to install (Plug&Play), remote management via web browser with ability to update software online. LCR functionality, ability to configure permissions (restrictions) for outgoing and incoming calls. PBX functions: call forwarding, call user group, 3PTY calls, 2 automatic work modes, CLIP, HOLD, 3 DISA announcements (possibility of individual announcements recording), MoH. Different types of ringtones for internal and external connections, work with different VoIP providers, work with analog phones – FAXes, VoIP-SIP phones. Print of connections history and automatic switch of work modes (day/night).



# ITS IP PBX - world is closer to you

		ITS-0106	ITS-0206	ITS-0286
Capacity	Analogue subscribers (FXS)	6	6	6
	Analogue trunks (FXO)	1	2	2
	IP subscribers (IPS)	1	1	8
	IP trunks (IPO)	2	2	6
	Ethernet port 10 / 100	1	1	1
Available compatible Slican devices		Slican analog phones XL-2023ID and XL-209		
		Slican VPS-2000P, VPS-804P, VPS-802 SIP phones		
		DPH door phones		
VoIP parameters	Supported protocols	SIP 2.0 (codec G.711)	SIP 2.0 (codec G.711, G.729)	
	Supporting third parties applications /devices	softphone applications or IP phone, VoIP gateways (SIP 2.0)		
	Working mode	VoIP master or / and slave		
Power supply		~230 V; 50 Hz; <15VA (external power supply)		
Dimension (mm) width x high x deep		191 x 111 x 36		
Technology		PURE-IP		

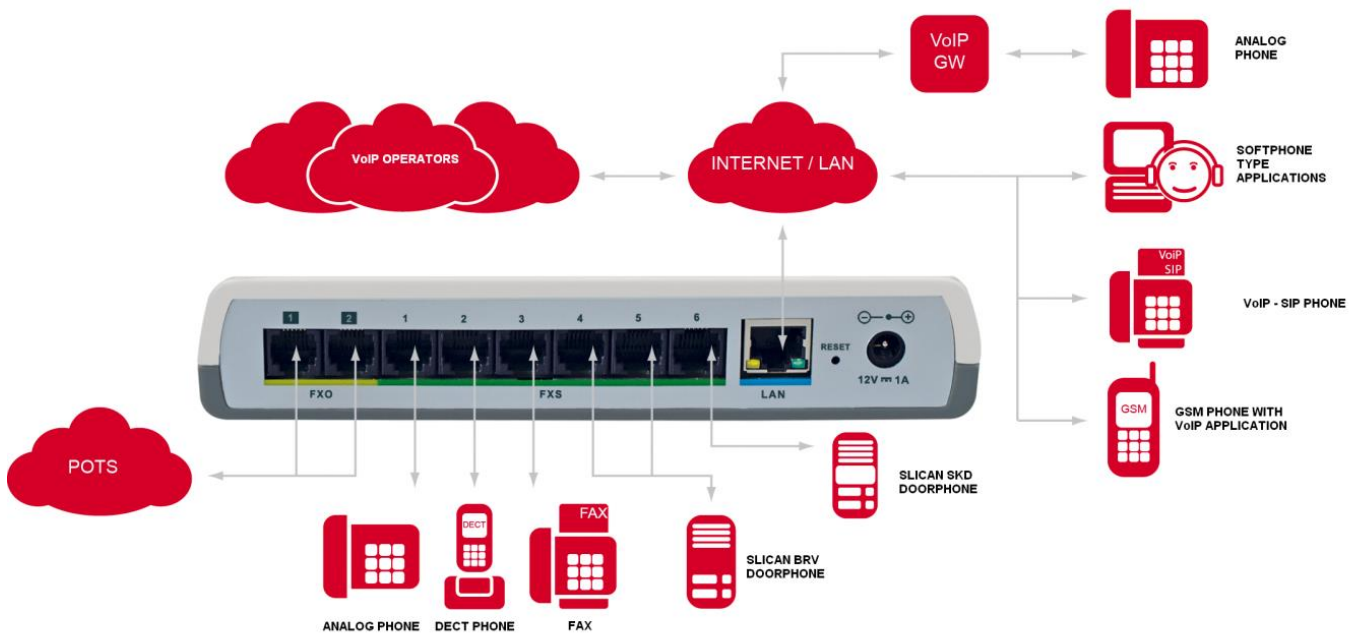

The presented material is for information purposes.

In order to properly configure of PBX, we recommend contact and consultation with Slican Distributor / Reseller.